


Q Window handle FG60L.ER

greenteQ Window Handle for Aluminium, Wood and PVC Windows.

Properties:

greenteQ window handle FG60L.ER; certification acc. to EN 13126-3:2011; 90° lock-in position; invisible fixing; stainless steel matt brushed; including screws and enclosed sleeves 10/12 mm.

Product picture and technical drawing:

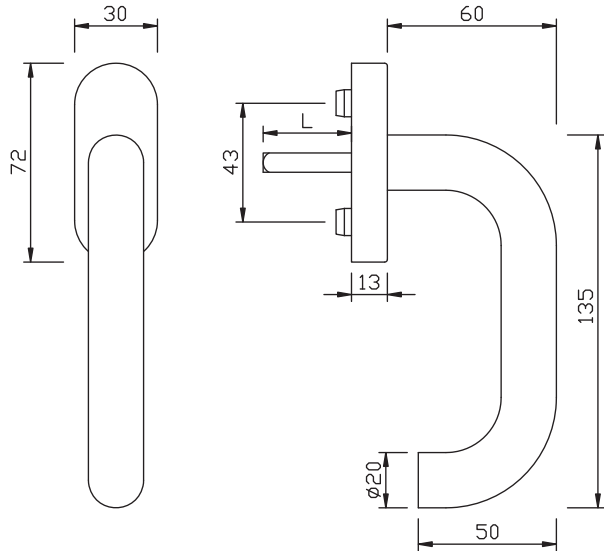

Technical data:

Material	Stainless steel (steel number 1.4301)
Surface	matt brushed
Certification acc. to	EN 13126-3
Lock-in position	90°
Square spindle	7 mm
Diameter of cam	10 mm (with 2 sleeves 10/12 mm)
Rosette	30 x 72 x 13 mm
Certificated acc. to EN 13126-3:2011	2 5/180 - 0 1 4 0/0 3/C1 -
Screws	Incl. 2 pieces M5 x 40/45/55
Packaging unit	10 pieces

Length of square spindle L	VBH Item Number
32 mm	394.951 / 6500
37 mm	394.952 / 6500
43 mm	394.953 / 6500

PRODUCT DATA SHEET

greenteQ

WINDOW HARDWARE - Window handle FG60L.ER

Edition 11/2013 | www.vbh.de

Instructions for use, performance and product data, and all other technical data for greenteQ products are general guidelines only. They describe the performance characteristics and material composition of our products. However, they constitute no guarantee according to § 443 BGB. Due to the various application possibilities it is the user's sole responsibility to satisfy himself that the product is adequate for his intended purpose. Any technical consultation with VBH, whether verbal, written or in the form of test samples is for your information only and is absolutely non-committal.